AD Frog 3D® ETSI

Overview

Frequency Band UHF 860 - 960 MHz

Chip

Impinj Monza 4i

Antenna Dimensions 40 x 40 mm / 1.58 x 1.58 in

International Standard

ISO 18000-63, EPC Class 1 Gen 2

Industry Segments Logistics

Applications

Asset Tracking Package tracking

RoHS

EU Directive 2011/65/EC and Directive (EU) 2015/863

REACH

Regulation (EC) No. 1907/2006



High performance product for supply chain applications

Our AD Frog 3D® inlays and tags are designed for pallet and case level applications offering high performance in supply chain management applications. Frog 3D® products have a small, cost-efficient True3D form factor with complete orientation insensitivity providing consistent performance even on challenging materials. High performance AD Frog 3D® inlays deliver excellent read range and are compatible with the Impinj Monza 4 IC family.

AD Frog 3D® tags and inlays are produced using leading-edge inlay assembly technologies. Monitoring every step in the production process, from the antenna to the final assembly of the inlay, guarantees optimal quality products.


Our inlays and tags are compliant with ISO 9001:2015 Quality Management and ISO 14001:2015 Environmental Management, which ensure a reliable and state-of-the-art product that meets a variety of application needs, enhancing RFID usage for difficult-to-tag materials.




Technical features

| Chip | Impinj Monza 4i |
|-----------------------|--------------------------------------|
| EPC and User Memory | 256-bit / 480-bit |
| TID Memory | 96-bit / 48-bit unique serial number |
| Product Code | 3006657 / IL-603163 |
| Delivery Format | Label / sticker |
| Die-Cut Dimension | 43 x 43 mm / 1.69 x 1.69 in |
| Inlay Substrate | PET |
| Face Sheet | Mid-gloss paper |
| Standard Pitch | 50 mm / 1.969 in |
| Web Width | 50 mm / 2 in |
| Core Size | 76 mm / 3 in |
| Quantity / Reel | 5,000 pcs/reel 10,000 pcs/box |
| Operating Temperature | -40 °C to 85 °C / -40 °F to 185 °F |
| | |

Orientation sensitivity




Read range

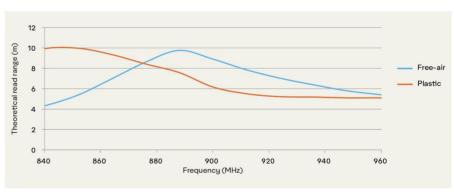

All graphs are indicative: performance in real life applications may vary.

Contact information

rfid.averydennison.com/contact +1-678-617-2359













© 2021 Avery Dennison Corp. All rights reserved. 170 Monarch Lane, Miamisburg, OH 45342, USA Third party trademarks and/or trade names used herein are the property of their respective owner(s). Some of the trademarks appear for identification purposes only.

Warranty: Please refer to Avery Dennison standard terms and conditions: rfid.averydennison.com/termsandconditions

Care and handling: RFID inlays are sensitive to ESD. Observe standard industry practices relating to electronics / RFID to keep environmental impact and static charge to a minimum.



Applications: This product should be tested by the customer / user thoroughly under end use conditions to ensure the product meets the particular requirements. Avery Dennison does not represent that this product is fit for any particular purpose or use. Avery Dennison reserves the right to modify, change, supplement or discontinue product offerings at any time without notice. The information contained herein is believed to be reliable but Avery Dennison makes no representation concerning the accuracy or correctness of the data.