

Frog 3D®

Overview

Frequency Band

UHF 860 - 960 MHz

Chip

Impinj Monza 4i

Antenna Dimensions

40 x 40 mm / 1.58 x 1.58 in

International Standard

ISO 18000-63, EPC Class 1 Gen 2

Industry Segments

Logistics

Applications

Asset Tracking
Package tracking

RoHS

EU Directive 2011/65/EC and
Directive (EU) 2015/863

REACH

Regulation (EC) No. 1907/2006



High performance product for supply chain applications

Our Frog 3D® inlays and tags are designed for pallet and case level applications offering high performance in supply chain management applications. Frog 3D® products have a small, cost-efficient True3D form factor with complete orientation insensitivity providing consistent performance even on challenging materials. High performance Frog 3D® inlays deliver excellent read range and are compatible with the Impinj Monza 4 IC family.


Frog 3D® tags and inlays are produced using leading-edge inlay assembly technologies. Monitoring every step in the production process, from the antenna to the final assembly of the inlay, guarantees optimal quality products.

Our inlays and tags are compliant with ISO 9001:2015 Quality Management and ISO 14001:2015 Environmental Management, which ensure a reliable and state-of-the-art product that meets a variety of application needs, enhancing RFID usage for difficult-to-tag materials.


Technical features

Chip	Impinj Monza 4i	
EPC and User Memory	256-bit / 480-bit	
TID Memory	96-bit / 48-bit unique serial number	
Product Code	3006656	3006657
Delivery Format	Wet inlay	Label / sticker
Die-Cut Dimension	43 x 43 mm / 1.69 x 1.69 in	
Inlay Substrate	PET	PET
Face Sheet	Clear PET 12	Mid-gloss paper
Standard Pitch	50 mm / 1.969 in	
Web Width	50 mm / 2 in	
Core Size	76 mm / 3 in	
Quantity / Reel	5,000 pcs/reel 10,000 pcs/box	5,000 pcs/reel 10,000 pcs/box
Operating Temperature	-40 °C to 85 °C / -40 °F to 185 °F	

Orientation sensitivity

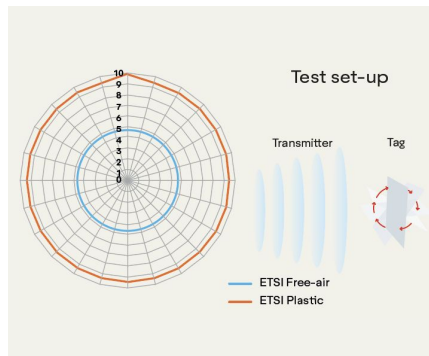

Read range

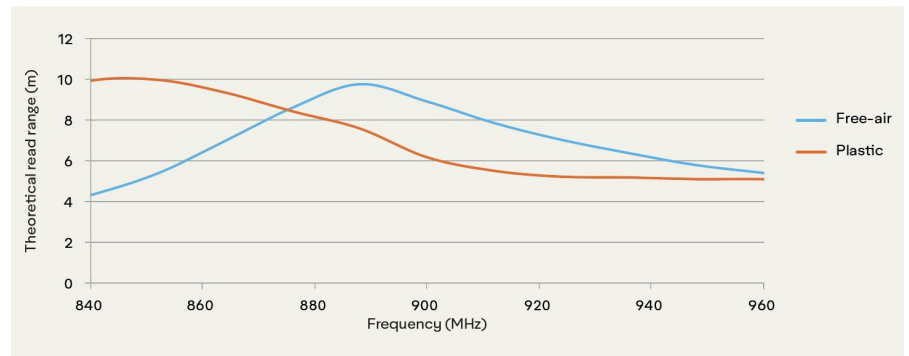

All graphs are indicative: performance in real life applications may vary.

Contact information

rfid.averydennison.com/contact
North America: +1-866-903-7343 (toll free US)
International: +1-678-617-2359

Connect with us on:



© 2021 Avery Dennison Corp. All rights reserved. 170 Monarch Lane, Miamisburg, OH 45342, USA Third party trademarks and/or trade names used herein are the property of their respective owner(s). Some of the trademarks appear for identification purposes only.

Warranty: Please refer to Avery Dennison standard terms and conditions: rfid.averydennison.com/termsandconditions

Care and handling: RFID inlays are sensitive to ESD. Observe standard industry practices relating to electronics / RFID to keep environmental impact and static charge to a minimum.

Applications: This product should be tested by the customer / user thoroughly under end use conditions to ensure the product meets the particular requirements. Avery Dennison does not represent that this product is fit for any particular purpose or use. Avery Dennison reserves the right to modify, change, supplement or discontinue product offerings at any time without notice. The information contained herein is believed to be reliable but Avery Dennison makes no representation concerning the accuracy or correctness of the data.

