

# AD Belt UCODE 7XM

## Overview

---

**Frequency Band**

UHF 860 - 960 MHz

---

**Chip**

NXP UCODE 7XM

---

**Antenna Dimensions**

70 x 10 mm / 2.76 x 0.39 in

---

**International Standard**

ISO 18000-6C, EPC Class 1 Gen 2

---

**Industry Segments**

Apparel  
Industrial Applications

---

**Applications**

Brand Protection  
Supply Chain Management  
Home Essentials

---


**RoHS**

EU Directive 2011/65/EC and  
Directive (EU) 2015/863

---

**REACH**

Regulation (EC) No 1907/2006

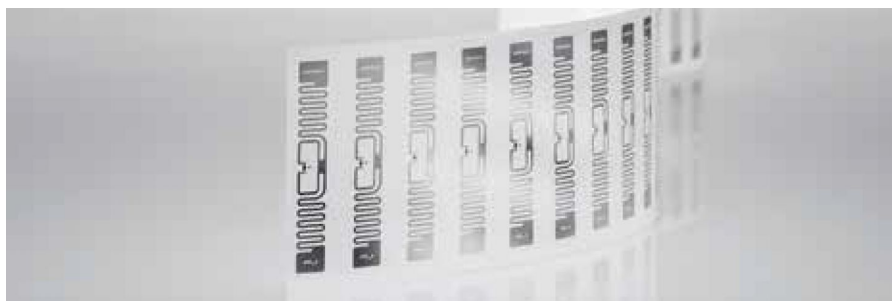

## Excellent global performance with extended memory

Our AD Belt UCODE 7XM inlays and tags with the new high memory ICs from NXP UCODE family are designed for global supply chain, industrial, RTI and applications, and offer excellent performance in demanding environments and on different materials.


AD Belt UCODE 7XM inlays and tags have good tolerance and performance on difficult-to-tag or low-detuning materials such as cardboard and plastics, and in other demanding environments. They are available with the latest NXP UCODE products, like UCODE 7xm with extended memory, supporting 2 kbit of user memory and 448 bit EPC memory. In addition, UCODE DNA is the world's first UHF IC to combine long-range read performance with cryptographic authentication and offers 3 kbit of user memory and 224 bit EPC memory. All chips offer unique TID and enable pre-serialized EPC, parallel encoding and provide a product status flag.

The inlay is size-optimized for 100 mm / 4 inch wide converted labels, and is available in dry, wet and label / sticker delivery formats. Our inlays and tags are compliant with ISO 9001:2015 Quality Management and ISO 14001:2015 Environmental Management, which ensure a reliable and state-of-the-art product that meets a variety of applications with extended user memory needs.


## Technical features

Chip	NXP UCODE 7XM		
EPC and User Memory	448-bit and 2048-bit		
TID Memory	96-bit / 48-bit unique serial number		
Product Code	3005418 / IL-602931	3005419 / IL-602932	3005420 / IL-602933
Delivery Format	Dry inlay	Wet inlay	Label / sticker
Die-Cut Dimension	–	73 x 13 mm / 2.87 x 0.51 in	73 x 13 mm / 2.87 x 0.51 in
Inlay Substrate	PET	PET	PET
Face Sheet	Clear PET	Clear PET	Opaque Matt Paper 79
Standard Pitch	20 mm / 0.787 in	20 mm / 0.787 in	20 mm / 0.787 in
Web Width	80 mm / 3 in	80 mm / 3 in	80 mm / 3 in
Core Size	76 mm / 3 in	76 mm / 3 in	76 mm / 3 in
Quantity / Reel	10000 pcs/reel 10000 pcs/box	10000 pcs/reel 10000 pcs/box	5000 pcs/reel 20000 pcs/box
Operating Temperature	-40 C to 85 C -40 F to 185 F		

## Orientation sensitivity

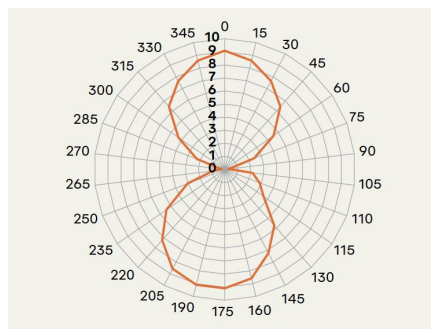

## Read range

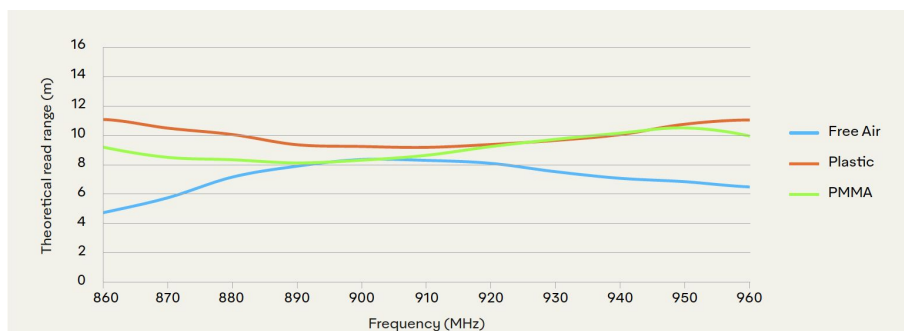

All graphs are indicative: performance in real life applications may vary.

### Contact information

[rfid.averydennison.com/contact](http://rfid.averydennison.com/contact)  
+1-678-617-2359

Connect with us on:



© 2021 Avery Dennison Corp. All rights reserved. 170 Monarch Lane, Miamisburg, OH 45342, USA Third party trademarks and/or trade names used herein are the property of their respective owner(s). Some of the trademarks appear for identification purposes only.

**Warranty:** Please refer to Avery Dennison standard terms and conditions: [rfid.averydennison.com/termsandconditions](http://rfid.averydennison.com/termsandconditions)

**Care and handling:** RFID inlays are sensitive to ESD. Observe standard industry practices relating to electronics / RFID to keep environmental impact and static charge to a minimum.

**Applications:** This product should be tested by the customer / user thoroughly under end use conditions to ensure the product meets the particular requirements. Avery Dennison does not represent that this product is fit for any particular purpose or use. Avery Dennison reserves the right to modify, change, supplement or discontinue product offerings at any time without notice. The information contained herein is believed to be reliable but Avery Dennison makes no representation concerning the accuracy or correctness of the data.

