

Block Lite

Overview

Frequency Band

HF 13.56 MHz

Chip

NXP ICODE SLIX
NXP ICODE SLIX2

Antenna Dimensions

47 x 47 mm / 1.85 x 1.85 in

International Standard

ISO 15693

Industry Segments

Media and Document Management
Industrial Applications

Applications

Library
Product Authentication
Pharmaceutical and Healthcare

RoHS

EU Directive 2011/65/EC and
Directive (EU) 2015/863

REACH

Regulation (EC) No. 1907/2006



Top-performance tag for library and media management applications

Our Block Lite inlays and tags featuring NXP ICODE SLIX and SLIX2 ICs are designed for library and other media management applications. Block products provide best-in-class read range, optimal size and performance in a compact, square package.


Block Lite with NXP ICODE SLIX provides 896-bit of user memory, while NXP ICODE SLIX2 boasts an extended user memory of 2,528-bit. The tag provides excellent performance in all printed media products and applications, including self-check with stack reading capability, and EAS. Block Lite delivered in paper-tag format and selected paper is resistant to aging (ISO 9706 compliant). Paper grade together with PH-neutral adhesive make it suitable for archiving applications. It is the ideal product to complement advanced media management systems and offers a lifetime library warranty.

Our inlays and tags are compliant with ISO 9001:2015 Quality Management and ISO 14001:2015 Environmental Management. This ensures a reliable and state-of-the-art product that meets a variety of application needs, where high performance is a critical parameter.


Technical features

Chip	NXP ICODE SLIX	NXP ICODE SLIX2
User Memory	896-bit	2500-bit
Product Code	3002138	3002987
Delivery Format	Label / sticker	Label / sticker
Die-Cut Dimension	50 x 50 mm / 1.97 x 1.97 in	50 x 50 mm / 1.97 x 1.97 in
Inlay Substrate	PET	PET
Face Sheet	Mid-gloss paper	Mid-gloss paper
Total Thickness	196 µm	196 µm
Standard Pitch	56 mm / 2.205 in	56 mm / 2.205 in
Web Width	54 mm / 2.126 in	54 mm / 2.126 in
Core Size	76 mm / 3 in	76 mm / 3 in
Quantity / Reel	2,000 pcs/reel 6,000 pcs/box	2,000 pcs/reel 6,000 pcs/box
Operating Temperature	-40 °C to 85 °C / -40 °F to 185 °F	

Read range

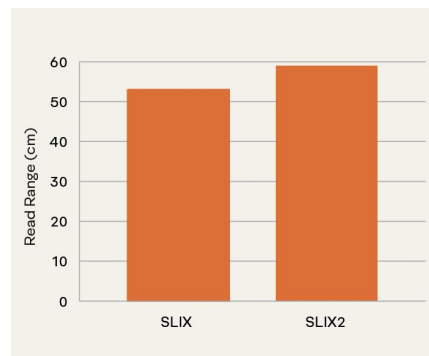

Stack test

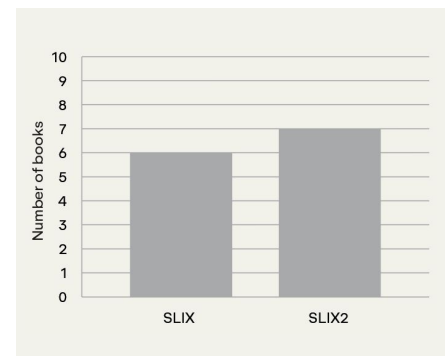

All graphs are indicative: performance in real life applications may vary.

Contact information

rfid.averydennison.com/contact

North America: +1-866-903-7343 (toll free US)

International: +1-678-617-2359

Connect with us on:



© 2021 Avery Dennison Corp. All rights reserved. 170 Monarch Lane, Miamisburg, OH 45342, USA Third party trademarks and/or trade names used herein are the property of their respective owner(s). Some of the trademarks appear for identification purposes only.

Warranty: Please refer to Avery Dennison standard terms and conditions: rfid.averydennison.com/termsandconditions

Care and handling: RFID inlays are sensitive to ESD. Observe standard industry practices relating to electronics / RFID to keep environmental impact and static charge to a minimum.

Applications: This product should be tested by the customer / user thoroughly under end use conditions to ensure the product meets the particular requirements. Avery Dennison does not represent that this product is fit for any particular purpose or use. Avery Dennison reserves the right to modify, change, supplement or discontinue product offerings at any time without notice. The information contained herein is believed to be reliable but Avery Dennison makes no representation concerning the accuracy or correctness of the data.

