

UHF GEN 2 RFID



Speedway[®] xPortal[™]

with *AUTOPILOT*

INTEGRATED PORTAL READER

The Speedway xPortal, an integrated portal reader, incorporates the industry-leading Speedway Revolution reader and Impinj's Dual-Linear Phased Array (DLPA) antenna technology, yielding the industry's smallest, most flexible, and cost-effective RFID portal solution.

Groundbreaking Portal Form Factor

Compact, flexible, high-performance integrated portal reader

Impinj's Speedway® xPortal™ solves the size and mounting limitations of traditional portals with a light-weight, low-profile unit that is as attractive as it is effective. Measuring approximately 30.5 x 8.75 x 2 in (77.5 x 22.2 x 5 cm) and weighing less than 6.5 lbs (3 kg), its compact form is unobtrusive, streamlined, and ultimately flexible, yet delivers better performance than larger, more costly industrial-scale portals.

Designed for retail, office, hospital, and other indoor environments, the Speedway xPortal reader is ideal for monitoring tagged items, pallets, equipment, files, or people passing through doorways, hallways, or other zonal coverage areas.

The Speedway xPortal, an integrated portal reader, incorporates the industry-leading Speedway Revolution architecture and Impinj's DLPA antenna technology.




Superior performance in the most demanding applications

Powered by the Speedway Revolution reader with Impinj's patented Autopilot™ technology, the Speedway xPortal reader continuously monitors the environment and RFID tag traffic to automatically and dynamically adapt its operating parameters to yield the best, most reliable performance. No longer do you need an RF engineer to install and configure your readers. Nor do you need to "re-tune" the reader when the environment changes—the Speedway xPortal manages all these concerns automatically.



Total zone coverage

The Speedway xPortal reader integrates high-performance Impinj-designed Dual-Linear Phased Array (DLPA) antenna technology with beam switching and polarization attributes that are dynamically managed by the reader. The system's DLPA antenna configuration provides broad coverage of the read zone, as the elements continuously alternate between vertical and horizontal polarizations, delivering full omni-directional power with greater consistency and intensity than circularly-polarized antennas. Harnessing the Autopilot capability, the Speedway xPortal senses exactly where tags appear in the field, automatically optimizing the read zone for the best, most efficient level of performance. And the Speedway xPortal reader's Low Duty Cycle function conserves energy while also eliminating unnecessary RF noise by limiting operation to only times when tags are detected within the field of view.

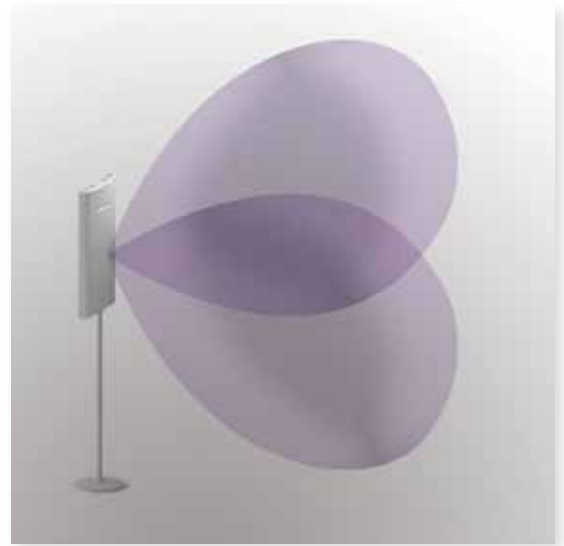


The Speedway xPortal DLPA antenna configuration provides full omni-directional power and zone coverage.

Unprecedented ease of deployment

Not only is the Speedway xPortal a high-performance RFID solution, it's also a practical one. With multiple mounting options to meet real world deployment challenges, the Speedway xPortal chassis incorporates keyhole slots and clearance holes, has VESA compliant mounting patterns, and accommodates gimbal brackets to enable a myriad of mounting possibilities. Fully enclosed cable management clips and conduit knockouts also help maintain a tidy appearance. In short, the Speedway xPortal can flank, pivot, stand-off, or mount overhead—accommodating just about anything your space requires—and look great doing it. The unit's clean, attractive appearance complements the look of any installation environment.

The Speedway xPortal's Power over Ethernet (PoE) connectivity simplifies deployment, eliminating the need for AC outlet installation at read points, and saving considerable energy in the process. In fact, owing to its remarkably low power consumption, the Speedway xPortal reader's energy costs are 75% lower than those of competing readers. PoE also provides for increased system availability via network infrastructure.

The Speedway xPortal combines Impinj technology, superior design, and proven components to deliver unmatched RFID system performance, intelligence, flexibility, and reliability. It is an excellent example of how Impinj is simply doing things better, solving the important challenges, and leading with the industry's most robust, innovative, and best-performing RFID systems.

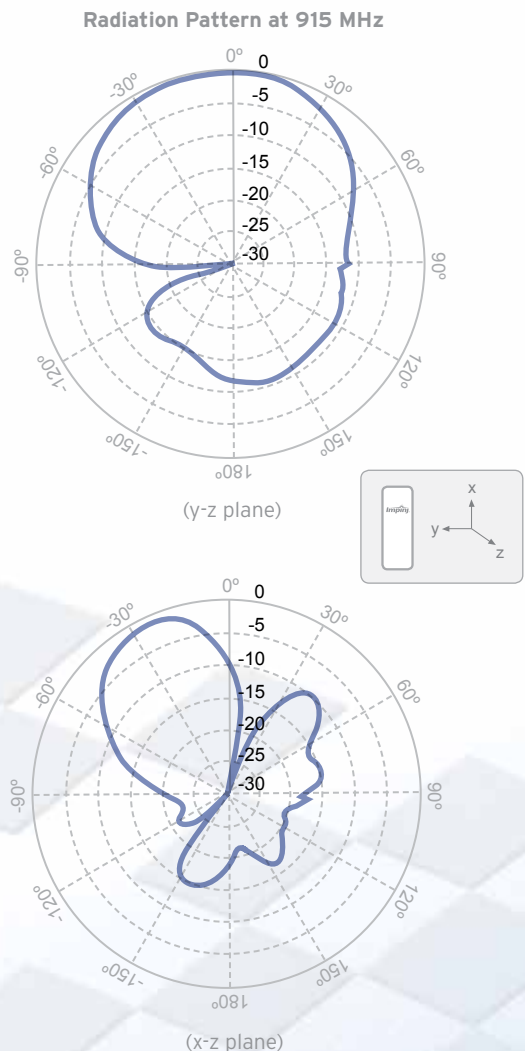

Speedway® xPortal™ Reader At A Glance

The Speedway xPortal, a high-performance, integrated portal reader, incorporates the industry-leading Speedway Revolution architecture and Impinj Dual-Linear Phased Array (DLPA) antenna technology.

PRODUCT DETAILS	SPEEDWAY R640
Air Interface Protocol	EPCglobal UHF Class 1 Gen 2 / ISO 18000-6C
Supported Regions or Geographies	<ul style="list-style-type: none"> • US, Canada, and other regions following US FCC Part 15 regulations (902-928 MHz) • Europe and other regions following ETSI EN 302 208 v1.2.1 without LBT regulations (865-868 MHz) • More regions available—check www.impinj.com for the latest information
Antennas	Dual-Linear Phased Array (DLPA) antenna technology
Radiated Power	FCC 4W EIRP, ETSI 2W ERP
HPBW (x-z plane)	60° +/- 3° (3 dB beam width)
HPBW (y-z plane)	80° +/- 3° (3 dB beam width)
Radome	High impact strength, UV, chemical and cleaning solution resistant
Transmit Power	FCC +10 to +28.5 dBm, ETSI +10 to +27.5 dBm
Max Receive Sensitivity	-82 dBm
Application Interface	EPCglobal Low Level Reader Protocol (LLRP) v1.0.1
Network Connectivity	10/100BASE-T auto-negotiate (full/half) with auto-sensing MDI/MDX for auto-crossover (RJ-45)
IP Address Configuration	DHCP, Static, or Link Local Addressing (LLA) with Multicast DNS (mDNS)
Time Synchronization	Network Time Protocol (NTP)
Management Interfaces	<ul style="list-style-type: none"> • Impinj Web Management UI • Impinj RShell Management Console using serial management console port, telnet or SSH • SNMPv2 MIBII • EPCglobal Reader Management v1.0.1 • Syslog
Reliable Firmware Upgrade	<ul style="list-style-type: none"> • Dual image partitions enable smooth transition to new firmware while the reader is still operating • Scalable upgrade mechanism enables simultaneous scheduled upgrades of multiple readers • USB Flash Drive • Impinj Web Management UI
Power Sources	<ul style="list-style-type: none"> • Power over Ethernet (PoE) IEEE 802.3af • +24V +/- 5% via external universal power supply with locking connector—sold separately
Environmental Sealing	IEC IP52
Operating Temperature	-20 °C to +50 °C
Humidity	5% to 95%, non-condensing
Dimensions (H x W x D)	30.5 x 8.75 x 2 in (77.5 x 22.2 x 5 cm)
Weight	6.5 lbs (3 kg)
Mounting Options	<ul style="list-style-type: none"> • Keyhole slots, clearance holes, and integrated threaded fasteners (1/4-20 X 1/4") • VESA MIS-D, 100/75, C (M4 X 7 mm thread depth) • Conduit knockouts for easy termination of conduit • Pass-through knockouts on back for data and power cabling
RoHS	Compliant to European Union directive 2002/95/EC

Impinj, Speedway, Powered by Impinj, xPortal, and Autopilot are either registered trademarks or trademarks of Impinj, Inc. Other brands and names may be claimed as the property of others.





www.logiscenter.com
902 050 030



www.logiscenter.it
02 479 216 97



www.logiscenter.de
info@logiscenter.de



www.logiscenter.pt
308 800 842

About LOGISCENTER

Grupo Logiscenter is the leading provider in Europe of automatic identification and data capture equipments. Our products include barcode printing and reading devices, mobile computing devices, wireless access points, identification cards, and consumables.

Reasons to work with us

Our customers come first. Our objective is not only selling our products but also holding a long-lasting relationship with our customers, based on the benefits and advantages we create for you and your company.

The best brands. We offer products from the best manufacturers worldwide.

Expert technical support team. Our support staff are experts in the products we sell. But not just the products, they can tell you the best solution for your particular problem or need.

Largest stock. We have a permanent stock of more than 12,000 products.

Same-day shipping. For all orders placed and confirmed before 16:00 on working days.

Best prices. With Logiscenter, you can be sure that you are paying a fair price for your products we will not overcharge you.

Easy returns. Damaged or defective products can be returned easily, for an exchange or reimbursement.

Our Brands



MOTOROLA




datamax • o'neil



Label printers




Barcode readers



Data terminals & PDA



PVC card printers



RFID



Consumables
(labels, ribbons, PVC cards)



**All Brands
Technical Service**